




K5

LED Linear High Bay Light

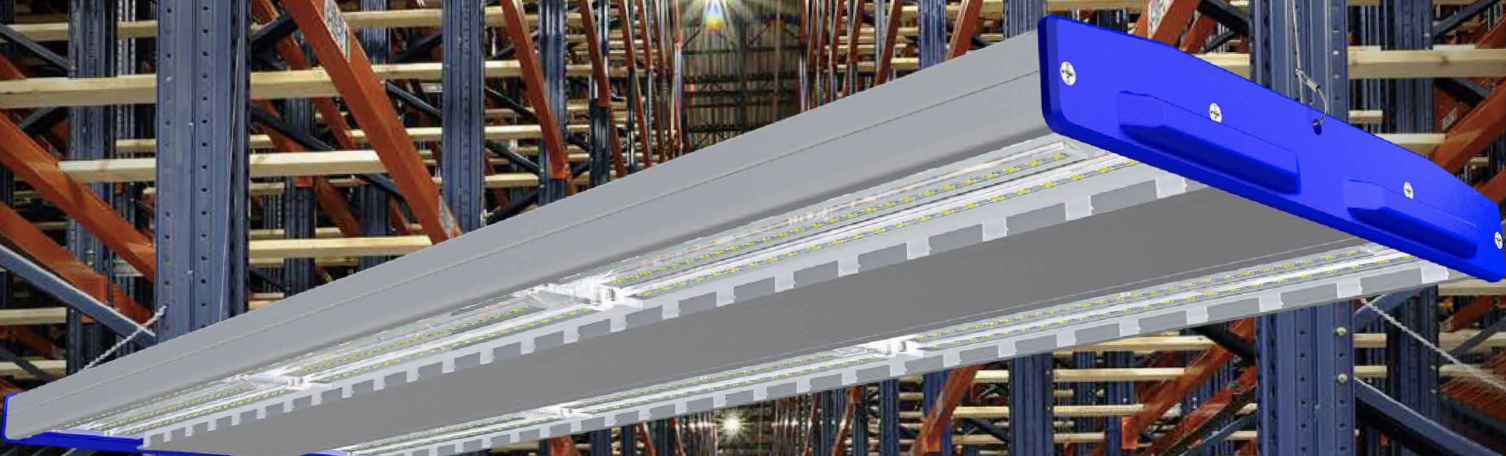

175LM/W

IP54


SEVEN - YEAR

7

WARRANTY




VEET CB IK10




Product Description

- High luminous efficacy up to 175lm/w
- Separate heat sink for led driver and led chip
- Intelligent lighting: Zigbee wireless control, daylight sensor dimming, microwave sensor dimming, three in one(0-10v,PWM, resistance) dimming available
- Colorful housing can be customized



kWh/1000h

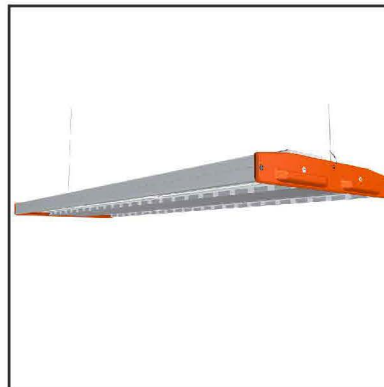

Features

There is a junction box alongside the fixture for preventing wiring exposed outside. It is safer practice and complied with wiring code


Thinner and lighter housing
Using high heat-conducting aviation aluminium materials isolating light source and led driver to reduce light loss and increase power factor of led driver

Aviation aluminum, customizable colors

The lenses are fixed by snap with less screws which makes assembling very conveniently.
With integral waterproof rubber around lens and rubber plug designed in outlet terminal, IP rating up to IP54
Three-dimensional diamond light guide technology

3030 SMD LED chip, high lumen
175LM/W

Accessories

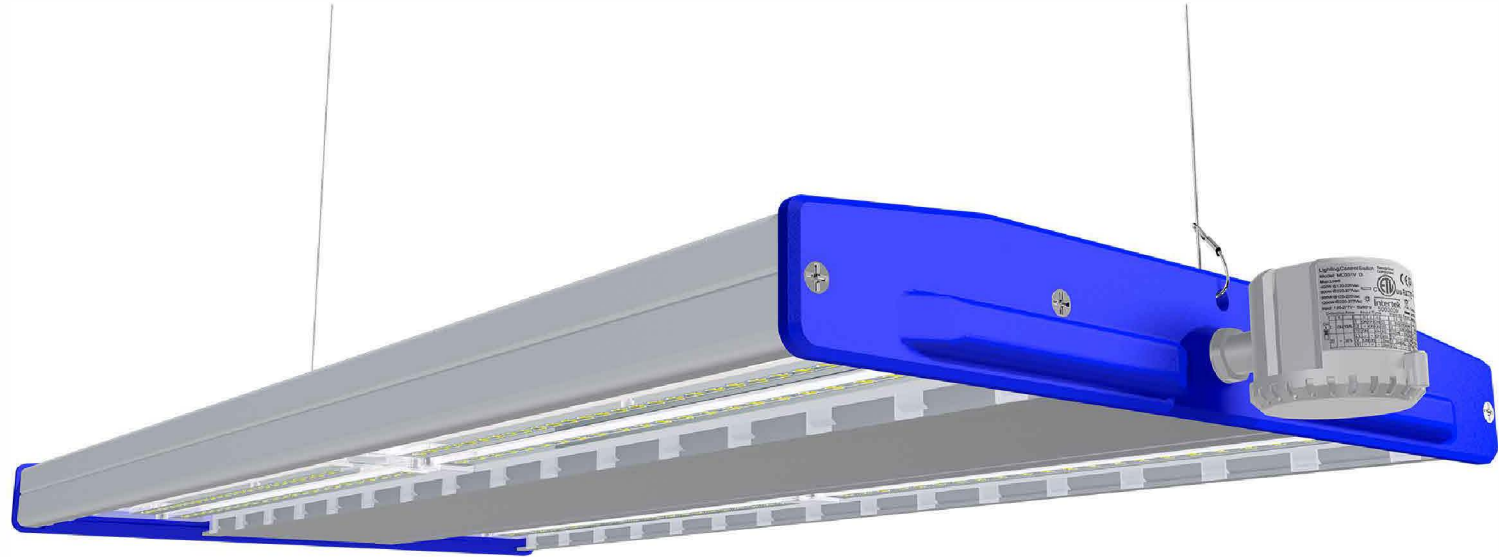

Motion sensor



Daylight sensor




Zigbee wireless control



100/150W


SPECIFICATIONS

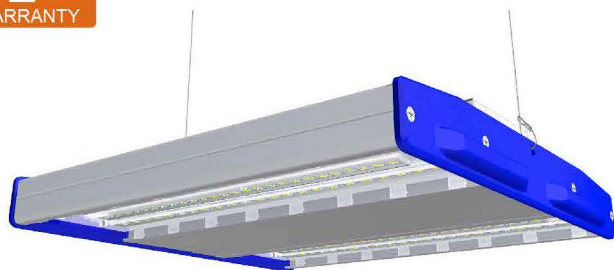

Technical Data

| | |
|-------------------|---|
| Model Number | HS-HB100/150W-K5 |
| Power | 100/150W |
| Luminous Efficacy | 175lm/W |
| Lumen Output | 17500lm/26250lm |
| LED Quantity | 168pcs |
| Dimension | 318*299*40.5mm |
| CCT | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |


Product Dimensions

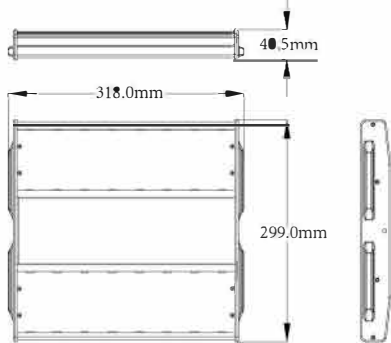

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |

Photometrics

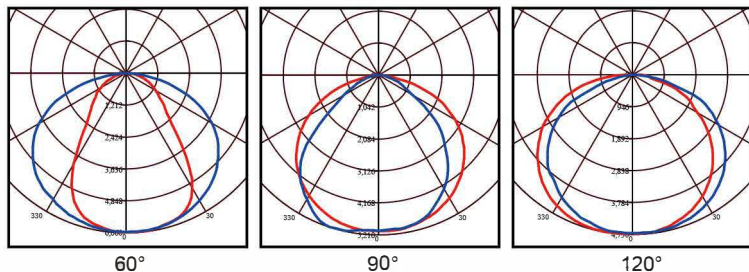

Other Details

| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 3KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |

K5 LED Linear High Bay Light

SEVEN - YEAR
7
WARRANTY

200/250W


SPECIFICATIONS



Technical Data

| | |
|-------------------|---|
| Model Number | HS-HB200/250W-K5 |
| Power | 200/250W |
| Luminous Efficacy | 175lm/W |
| Lumen Output | 35000lm/43750lm |
| LED Quantity | 336pcs |
| Dimension | 613*299*40.5mm |
| CCT | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |


Product Dimensions

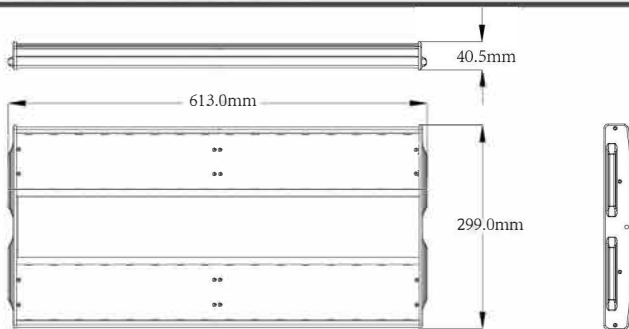

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |

Photometrics

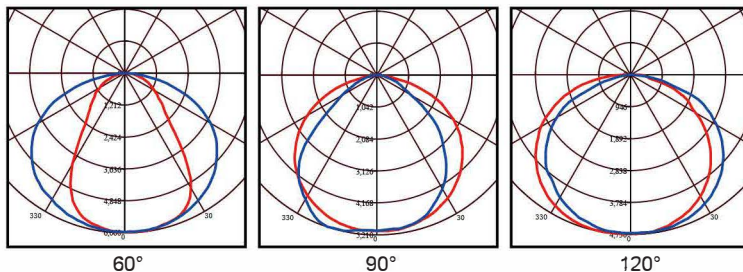

Other Details


| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 4.7KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |

K5 LED Linear High Bay Light

SEVEN - YEAR
7
WARRANTY

300W


SPECIFICATIONS

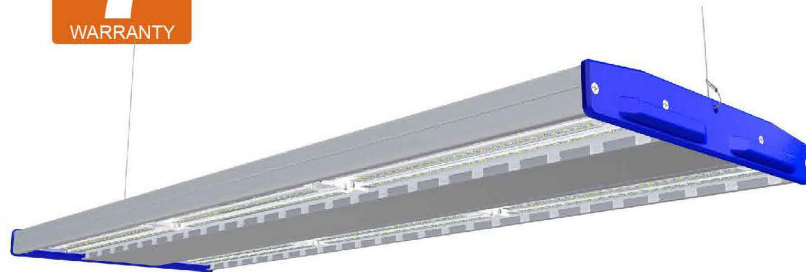


Technical Data

| | |
|-------------------|---|
| Model Number | HS-HB300W-K5 |
| Power | 300W |
| Luminous Efficacy | 175lm/W |
| Lumen Output | 52500lm |
| LED Quantity | 504pcs |
| Dimension | 908*299*40.5mm |
| CCT | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |

Product Dimensions

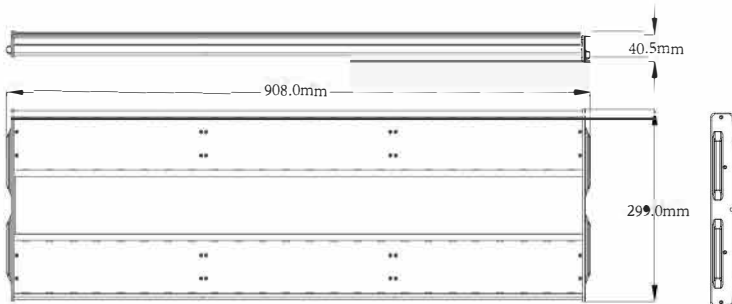

Photometrics

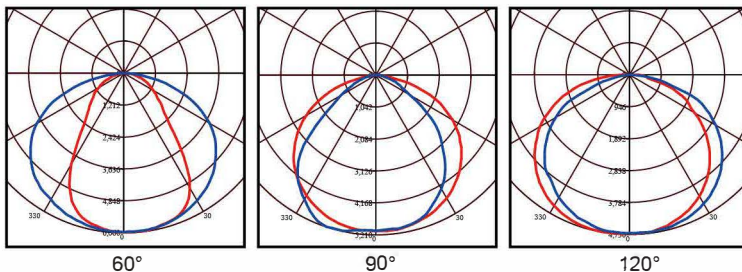

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |

Other Details

| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 6.7KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |




400/500W SPECIFICATIONS

Technical Data

| | |
|-------------------|---|
| Model Number | HS-HB400/500W-K5 |
| Power | 400/500W |
| Luminous Efficacy | 175lm/W |
| Lumen Output | 70000lm/87500lm |
| LED Quantity | 672pcs |
| Dimension | 1203*299*40.5mm |
| CCT | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |


Product Dimensions

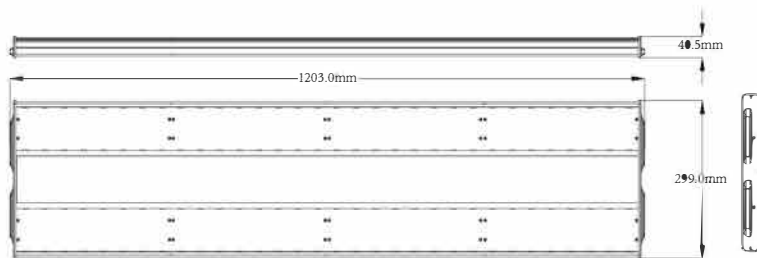

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |


Photometrics

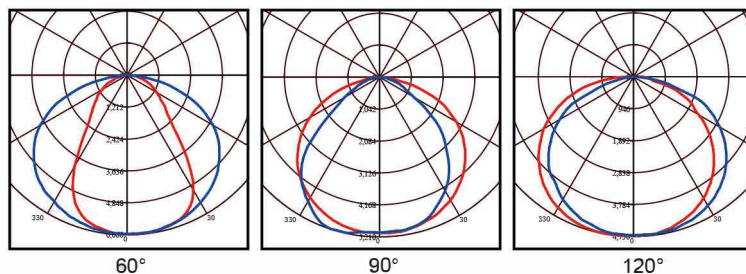


Other Details

| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 8.6KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |

Installation

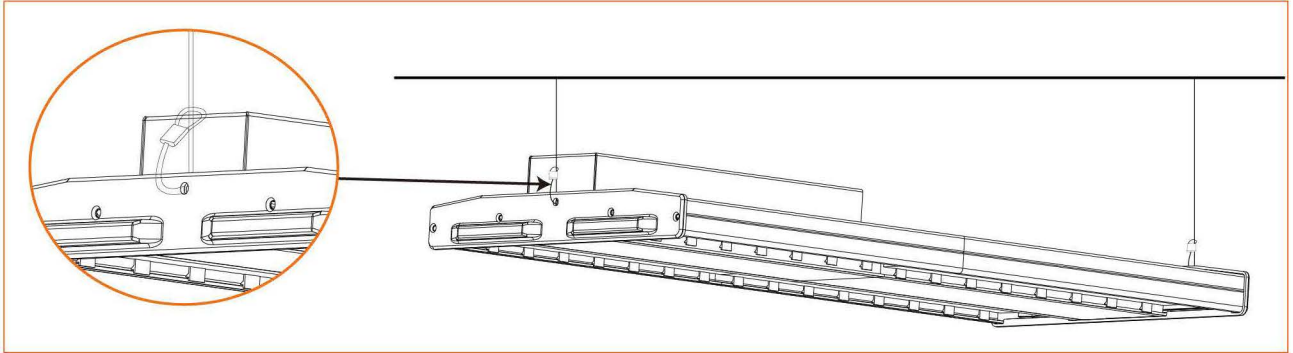

Application

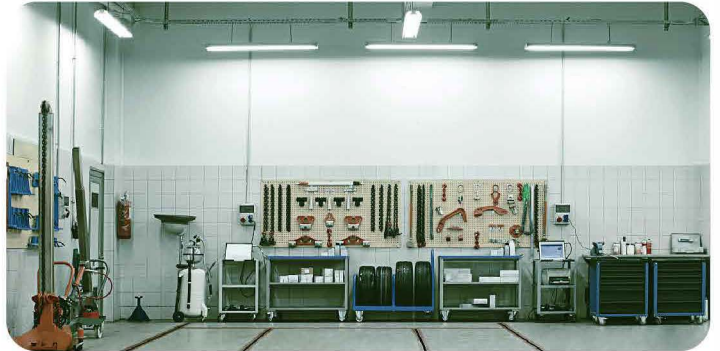

Widely use in Factory, Workshop, Warehouse, Logistics Center, Exhibition Hall, Stadium, Gas Station, Supermarket and etc.

Packing Info

| Model No. | N.G(KG) | G.W (KG) | Pcs/carton | Carton Size(CM) |
|-----------|---------|----------|------------|-----------------|
| BA429 | 3 | 3.7 | 1 | 36*35*13 |
| BA430 | 3 | 3.7 | 1 | 36*35*13 |
| BA431 | 4.7 | 5.5 | 1 | 65.5*35*13 |
| BA432 | 4.7 | 5.5 | 1 | 65.5*35*13 |
| BA433 | 6.7 | 7.6 | 1 | 95*35*13 |
| BA434 | 8.6 | 9.6 | 1 | 124.5*35*13 |
| BA435 | 8.6 | 9.6 | 1 | 124.5*35*13 |