

# Farm Red&White LED Tubular Light

## Features

- IP67 & IP69K
- PMMA IK08 / PC IK10
- Anti-ammonia
- Against water pressure of 100bar(1450psi) and temperature of 80 °C
- High CRI >80
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 120°
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHs Certified
- Surface Mount or Suspended




**Farm Red&WhiteLED Tubular Light**

- PC IK10 / PMMA IK08
- Anti-ammonia
- Chemical resistant
- Against water pressure of 100bar(1450psi) and temperature of 120 C


## Applications

- Poultry Lighting
- Farm lighting

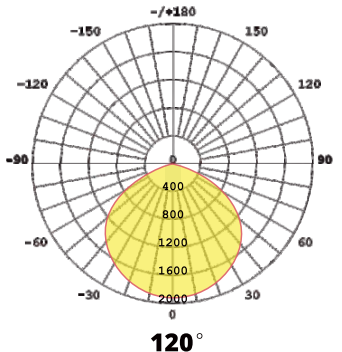


# Farm Red&White LED Tubular Light




20W

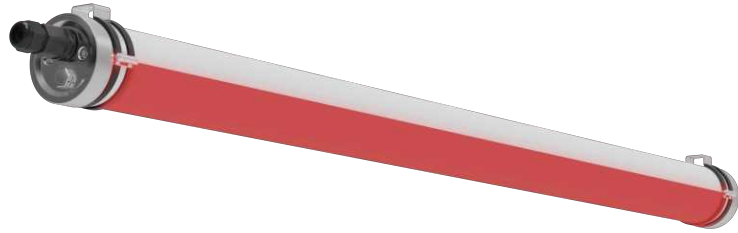

Single installation



Linkable Installation

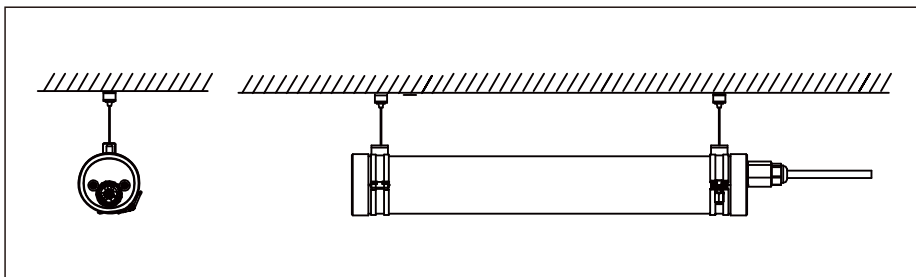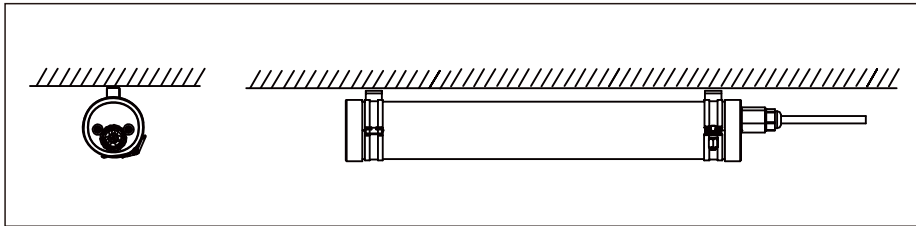

## Specifications

<b>Product Code</b>		IT-L94F-20W-RW	
<b>Power</b>		20W White + 20W Red	
<b>Input Voltage</b>		200-240VAC(50/60HZ)	
<b>PF</b>		0.90@220VAC	
<b>Dimming</b>		0-10V	
<b>CCT</b>		4000K(White) & 627nm(Red)	
<b>Ra &gt; 80</b>	<b>Luminous Flux</b>	2600Lm±5%	900Lm±5%
	<b>Efficiency</b>	4000K 130Lm/W±5%	Red 45Lm/W±5%
<b>LED Brand</b>		Lumileds/Hongli 2835	
<b>Beam Angle</b>		120°	
<b>Operation Temp</b>		-20 C ~ +40 C	
<b>Storage Temp</b>		-20 C ~ +60 C	
<b>Life Span</b>		Ta 40 C L70>54000Hours	
<b>IP Class</b>		IP67 & IP69K	
<b>IK Class</b>		PMMA IK08 / PC IK10	
<b>Certificate</b>		CE, RoHs, IK10, IP69K,D-Mark,	
<b>Lamp Body Color</b>		Milky PC / PMMA Housing & 304 / 316 Stainless Steel End Caps	
<b>Product Size (mm)</b>		Ø75*1152	
<b>Packing Size (mm)</b>		1330*260*180	
<b>Quantity/carton</b>		6PCS	
<b>Gross weight (kg) ±0.3</b>		15	
<b>Installation mode</b>		Surface Mount / Suspension Mount	