




Appearance Parameters

Model	Dimension (mm)			Product Size (mm)	Cut out (mm)
	A	B	C		
BA-PL3030	295	295	10	295x295x10	300x300
BA-PL3060	595	295	10	595x295x10	600x300
BA-PL6060	595	595	10	595x595x10	600x600
BA-PL6262	620	620	10	620x620x10	620x620
BA-PL30120	1195	295	10	1195x295x10	1200x300
BA-PL60120	1195	595	10	1195x595x10	1200x600




Technical Specifications

Voltage: AC100-240V / AC200-240V
 Power: 18W / 36W / 45W / 56W / 72W
 Power Factor: ≥0.9
 Beam angle: 120°
 CCT: 3000K 4000K 5000K 5700K


Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac dimmable & DALI dimmable
 Surface color: Silver / White

Installation


1. Recessed into ceiling




1. Remove ceiling plaster slab



2. Connect power supply




3. Fix the panel light into right place




4. Stabilize the panel


2. Suspending



1. A. Fix the anchor into target place on the ceiling
 B. Fix the installation mount on the ceiling with plastic anchor




3. Adjust the length of steel wire. Connect the power supply




2. Hang the panel to ceiling with suspended installation kits


3. Surface mounted




1. Fix the frame on the ceiling with screw

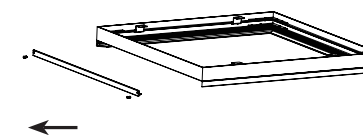


2. Pull down the side frame



3. Push the panel into the frame, connect the driver



4. Install the side frame



5. Turn on the power switch, finish the installation