



LED 3-Phase Track Light Delta Pro



DESCRIPTION

The Noxion LED 3-Phase Track Light Delta Pro is a premium LED track light perfect for illuminating shops, supermarkets and showrooms. The fixture comes with 60.000 lifetime hours, thermal design and high color rendering of >90. Thanks to Delta Pro Universal Global Adapter, the Delta Pro can be connected to track system such as: Global, Eutrac tracks or other certified rail systems. It can also be connected according to Phase 0, 1, 2 and 3. Maintenance and replacement costs can be easily reduced when switching from existing CDM/ HCI fixtures to our LED Track Light Delta Pro. Our Noxion Track Light Delta Pro is available in white and black. They are all 90-degree tiltable and 350 degree rotatable, allowing the selected products and places to be accentuated. With the Delta Pro LED Track Light, your building is ready for the future.

APPLICATIONS



Office



Hotel



Restaurant



Retail



Residence

PRODUCT LIST

Item No.	EAN	Item Description	Power (W)	Lumen (lm)	CCT (K)	Efficacy (lm/W)	Input Current (mA)	CRI
252898	8719157058131	LED 3-Phase Track Light Delta Pro 3CCT(930-957) MAX 4900lm 36° UGR<19 White	20	2300/2500/2500	3000/4000/5700	120	130	90
			30	3400/3700/3600	3000/4000/5700	120	180	90
			40	4400/4900/4700	3000/4000/5700	120	230	90
252899	8719157058148	LED 3-Phase Track Light Delta Pro 3CCT(930-957) MAX 4900lm 36° UGR<19 Black	20	2300/2500/2500	3000/4000/5700	120	130	90
			30	3400/3700/3600	3000/4000/5700	120	180	90
			40	4400/4900/4700	3000/4000/5700	120	230	90

PRODUCT LIST

Item No.	EAN	Item Description	Power (W)	Lumen (lm)	CCT (K)	Efficacy (lm/W)	Input Current (mA)	CRI
255332	8719157066846	LED 3-Phase Track Light Delta Pro 20W 3CCT(930-957) MAX 4900lm 36° UGR<19 White	20	2300/2500/2500	3000/4000/5700	120	130	90
255333	8719157066853	LED 3-Phase Track Light Delta Pro 20W 3CCT(930-957) MAX 4900lm 36° UGR<19 Black	20	2300/2500/2500	3000/4000/5700	120	130	90
255334	8719157066860	LED 3-Phase Track Light Delta Pro 30W 3CCT(930-957) MAX 4900lm 36° UGR<19 White	30	3400/3700/3600	3000/4000/5700	120	180	90
255335	8719157066877	LED 3-Phase Track Light Delta Pro 30W 3CCT(930-957) MAX 4900lm 36° UGR<19 Black	30	3400/3700/3600	3000/4000/5700	120	180	90

SPECIFICATION

Technical Specifications	
UGR	UGR<19
Dimmable	Non Dimmable
Beam Angle	36°
Tilttable	90°
Rotatable	350°
IP	IP20
IK	IK07
Protection Class	Class II
Integrated Driver (Yes/No)	Yes
Glow Wire Test	650°
SDCM	≤ 4 (3000K/5700K) ; ≤ 6 (4000K)
Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220-240V~
AC/DC	AC
Power Factor (PF)	PF≥0.9 (20W) / PF≥0.95 (30W, 40W)
Displacement Factor (DF)	DF≥0.7 (20W) / DF≥0.9 (30W, 40W)

Mechanical Properties	
Housing Material	Fixture: Aluminum / Driver: Plastic
Color (Housing)	White / Black
Optic/Diffuser	Glass
Reflector	Aluminum

Application	
Operating Temperature	-20°C~+45°C
Storage Temperature	-20°C~+60°C
Lifespan L70B50 at 25°C	60,000hrs

Certifications	
Fixture Certifications	CE / RoHS

ACCESSORIES

Item No.	EAN	Item Description
252916	8719157058315	Noxion Reflector for Track Light Delta Pro 24 degree Beam angle
252917	8719157058322	Noxion Reflector for Track Light Delta Pro 60 degree Beam angle
252918	8719157058339	Noxion Honeycomb for Track Light Delta Pro



PACKAGING INFORMATION

Item No.	EAN	Item Description	Box 1 item		Masterbox		
			Dimension (mm) (LxWxH)	Weight (kg)	Units per masterbox	Dimension (mm) (LxWxH)	Weight (kg)
252898	8719157058131	LED 3-Phase Track Light Delta Pro 3CCT(930-957) MAX 4900lm 36° UGR<19 White	190*105*205	1	15	580*220*560	14.8
252899	8719157058148	LED 3-Phase Track Light Delta Pro 3CCT(930-957) MAX 4900lm 36° UGR<19 Black	190*105*205	1	15	580*220*560	14.8
255332	8719157066846	LED 3-Phase Track Light Delta Pro 20W 3CCT(930-957) MAX 4900lm 36° UGR<19 White	190*105*205	1	15	580*220*560	14.8
255333	8719157066853	LED 3-Phase Track Light Delta Pro 20W 3CCT(930-957) MAX 4900lm 36° UGR<19 Black	190*105*205	1	15	580*220*560	14.8
255334	8719157066860	LED 3-Phase Track Light Delta Pro 30W 3CCT(930-957) MAX 4900lm 36° UGR<19 White	190*105*205	1	15	580*220*560	14.8
255335	8719157066877	LED 3-Phase Track Light Delta Pro 30W 3CCT(930-957) MAX 4900lm 36° UGR<19 Black	190*105*205	1	15	580*220*560	14.8


SPECIFICATIONS DRIVER

Item	Track Light Delta Pro	Remarks
Inrush Current Ipeak(A)	20	Input Voltage 230V
Inrush Current Twidth(μs)	50	Input Voltage 230V, measured at 50% Ipeak

CIRCUIT BREAKER


Item	Track Light Delta Pro
B16	48PCS
C16	77PCS

DIMENSIONAL DRAWING

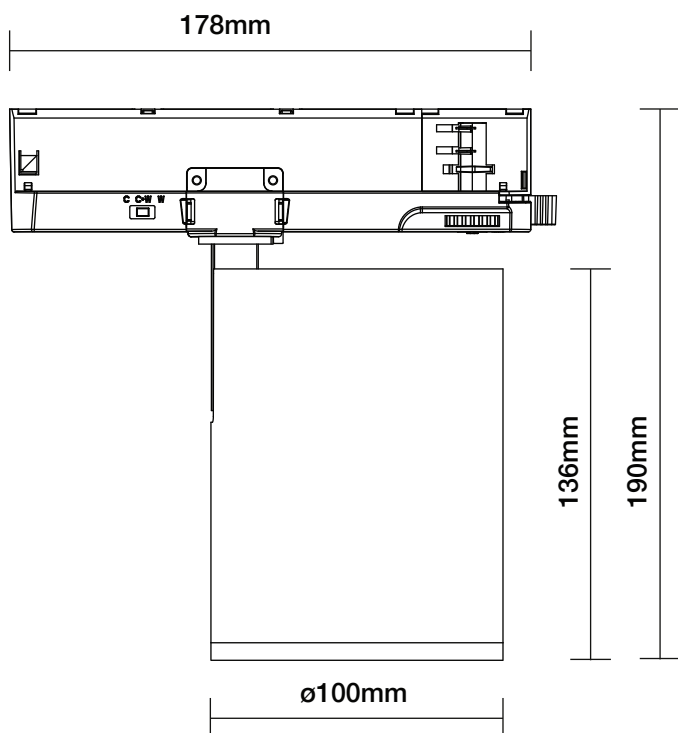


PHOTOMETRIC SPECIFICATIONS


20W

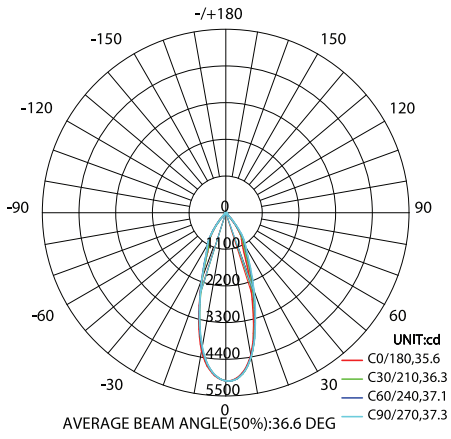

30W

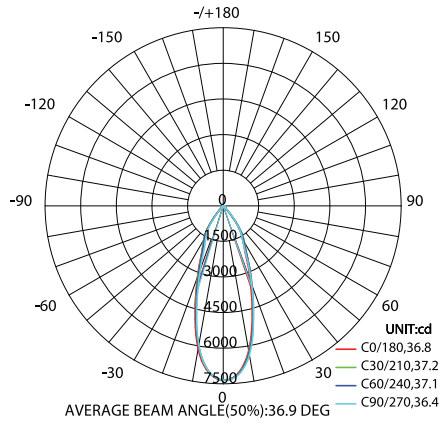

40W

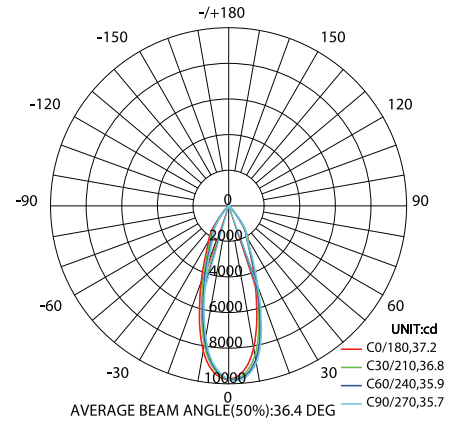

NOXION®

© 2025 Noxion B.V. - All rights reserved. Noxion retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors.